

External reader F007

Biometric Access Control Access Unit

Our new self-contained entry control access unit supports door opening using fingerprint and EM RFID media (EM 125 KHz card, tag, wristband, etc.)

The biometric reader will impress you with its performance, reliability and solid metal construction of the machine for fingerprints & card entry.

It is used in business organizations, offices, factories, family houses, etc. It is easy to install and program.




PROPERTIES

- : Strong metal body - resistant, durable, with anti-vandal function
- : Identification by fingerprint or RFID chip
- : Capacity up to 2160 users. 160 fingerprints & 2000 chips
- : Wiegand 26 input & output
- : Possibility of connection with other units
- : Possibility of control:
 - locks, automatic doors, door drives, alarms, exit button
- : Very simple operation
- : Programming by Master card or remote control
- : Dimensions: 115x70x35 mm
- : Suitable for controlling access to buildings from family houses to large businesses

SPECIFICATIONS

Operating voltage	DC+12V±10%
Idle power consumption	≤20mA
Standby current:	≤80mA
Card reading distance	3~6 cm
Operating temperature:	-10~+50°C.
Operating humidity:	20%RH-95%RH
Resolution:	450 DPI
Time to resolve fingerprint:	<1S
Identification time:	<1S
FAR	<0.0000256%
FRR	<0.0198%
Material:	Zinc alloy
Dimensions:	115mm×70mm×35mm

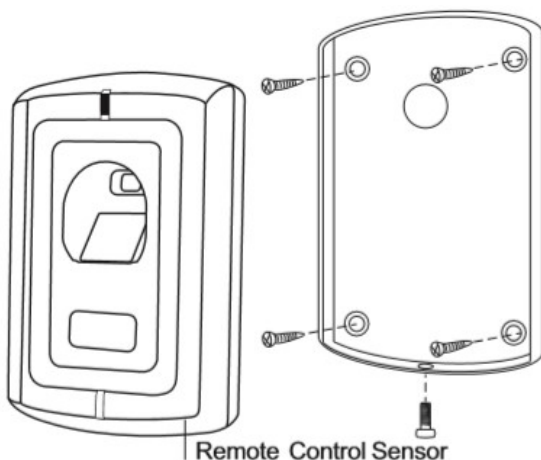

ACS Solution Zbyněk POCHMANN
manažer obchodu

Kočova 514 / 20 tel. +420 776 784 744
181 00 Praha 8 email: pochmann@acssolution.cz
Česká Republika www.acssolution.cz

www.acssolution.cz

The leader in door opening solution

Updated: 2/2023 | ACS Solution s.r.o. Specifications can subject to change without notice Note: The colors of the images in this brochure may differ from the actual colors